


PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : F16L 59/06, B29C 53/06, B32B 5/18	A1	(11) International Publication Number: WO 96/32605 (43) International Publication Date: 17 October 1996 (17.10.96)
(21) International Application Number: PCT/EP96/01158 (22) International Filing Date: 18 March 1996 (18.03.96) (30) Priority Data: 95200934.8 13 April 1995 (13.04.95) EP <i>(34) Countries for which the regional or international application was filed:</i> DE et al. (71) Applicant: IMPERIAL CHEMICAL INDUSTRIES PLC [GB/GB]; Imperial Chemical House, Millbank, London SW1P 3JF (GB). (72) Inventors: BIESMANS, Guy, Leon, Jean, Ghislain; Vinkenlaan 9, B-3078 Everberg (BE). DE VOS, Rik; Via File. Rosselli, 42, I-21100 Varese (IT). (74) Agents: SWINNEN, Anne, Marie et al.; ICI Europe Ltd., ICI Polyurethanes, Intellectual Property Dept., Everslaan 45, B-3078 Everberg (BE).		(81) Designated States: AU, CA, CN, JP, KR, MX, NZ, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i>

(54) Title: NON-PLANAR EVACUATED INSULATION PANELS AND A METHOD FOR MAKING SAME**(57) Abstract**

Non-planar integral evacuated insulation panels and a method for making these by providing grooves in the filler material prior to enveloping said filler and forming by evacuating, which method allows to make evacuated insulation panels of specific non-planar shapes depending on the depth and shape of the grooves.

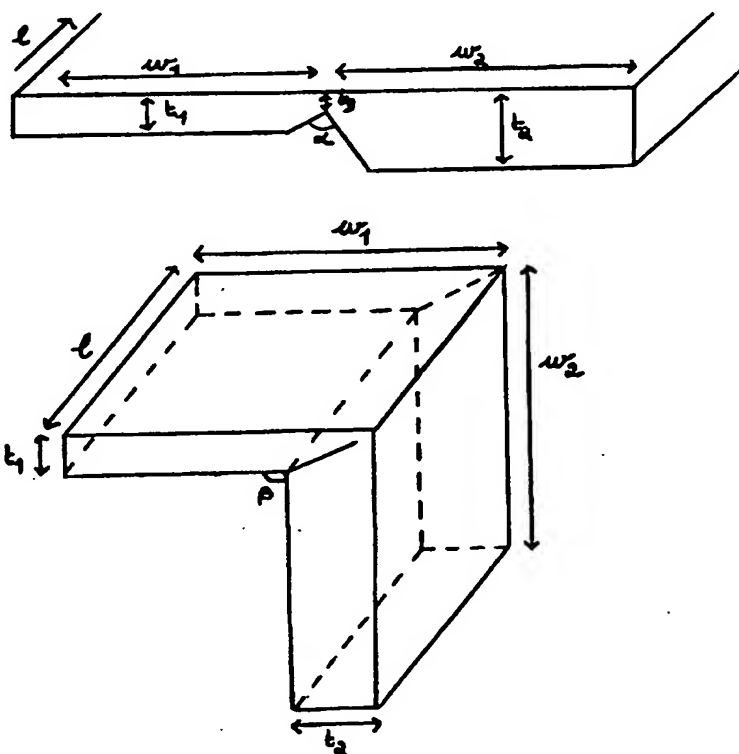

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

DESCRIPTION

NON-PLANAR EVACUATED INSULATION PANELS AND A METHOD FOR MAKING SAME

5 The present invention relates to non-planar evacuated insulation panels, a method for the production thereof, and their use for thermal insulation purposes.

Evacuated insulation panels and methods for their production are known.

10

Evacuated insulation panels having a reduced internal pressure are known for various uses including use in refrigeration appliances where they greatly enhance the degree of thermal insulation within the cabinet of the appliance.

15

Such evacuated insulation panels generally comprise a low thermal conductivity filler material and a vessel formed of a gastight film enveloping said filler, the whole being evacuated to an internal pressure of about 5 mbar or less and then hermetically sealed. Besides insulation
20 the filler has also the function of supporting the skin of the vessel so that it does not collapse when it is evacuated.

20

Known filler materials for use in such evacuated insulation panels include finely divided inorganic powders such as fumed silica, silica dust,
25 precipitated silica, precipitated silica/fly ash mixtures, alumina, fine perlite and fiberglass. It has also been proposed, in Japanese Patent Application Kokai No. 133870/82, to use organic foamed materials having open cells as the core material in evacuated insulation panels, for example, open celled rigid polyurethane foam (see European Patent Publications Nos 0498628
30 and 0188806).

30

Most of the known evacuated insulation panels are of a planar structure. However it has been found desirable to provide three-dimensional constructions of evacuated insulation panels (for example, bended or curved
35 constructions) especially to cover corners and roundings in refrigerators such as in the compressor zone.

35

Methods hitherto disclosed to make three-dimensional constructions from evacuated panels consist of assembling, e.g. joining by way of an adhesive,
40 pre-fabricated flat panels in such a way that the desired shape is obtained (see e.g. European Patent Publication Nos 434225, 434226 and 437930 and German Patent Publication No. 4230065).

40

Folding of pre-fabricated flat panels has also been suggested. V-shaped
45 grooves can be provided in the panels in order to make them foldable (see, for example, FR 2636255).

45

In this way box-like constructions can be obtained. Prefabricated, V-shape grooved panels that can be folded in order to obtain a box-like construction and which can be provided between the housing walls of freezers or refrigerators have been described, for example, in DE 4311510.

However, in constructions consisting of assembled flat panels gaps occur, specifically at the edges, which give rise to substantial and undesirable local heat losses.

Furthermore, the known methods to make three-dimensional constructions of evacuated insulation panels involve a multitude of production steps which render the production of such panels complicated and time-consuming.

It would therefore be highly desirable to provide rigid, integral, non-planar evacuated insulation panels as well as an economical method for making such panels.

It has now surprisingly been found that shaped evacuated insulation panels can be made by providing the open celled foamed insulation material within said panels with grooves prior to evacuation and forming by evacuation.

Accordingly, the present invention relates to rigid non-planar integral evacuated insulation panels comprising an open celled insulating foam enveloped in a substantially gas impermeable flexible vessel.

Suitable insulating foams are open celled organic foamed materials. The open celled organic foamed material to be used as insulating foam may be derived from the following materials : polyurethanes, polystyrenes, polyethylenes, acrylics, phenolics (such as phenol formaldehyde), halogenated polymers such as polyvinylchloride. In this invention most preference is given to open celled rigid polyurethane and urethane-modified polyisocyanurate foams.

Open celled rigid polyurethane and urethane-modified polyisocyanurate foams are in general prepared by reacting the appropriate organic polyisocyanate and polyfunctional isocyanate-reactive compound in the presence of a cell-opening agent. Examples of formulations for making open celled rigid polyurethane foam are described in European patent publications nos 0498628, 0547515, 0188806 and in PCT patent publication no. 95/02620.

Suitable organic polyisocyanates for use in the preparation of open celled rigid polyurethane foams include any of those known in the art for the preparation of rigid polyurethane or urethane-modified polyisocyanurate foams, and in particular the aromatic polyisocyanates such as diphenylmethane diisocyanate in the form of its 2,4'-, 2,2'- and 4,4'-isomers and mixtures thereof, the mixtures of diphenylmethane

diisocyanates (MDI) and oligomers thereof known in the art as "crude" or polymeric MDI (polymethylene polyphenylene polyisocyanates) having an isocyanate functionality of greater than 2, toluene diisocyanate in the form of its 2,4- and 2,6-isomers and mixtures thereof, 1,5-naphthalene diisocyanate and 1,4-diisocyanatobenzene. Other organic polyisocyanates which may be mentioned include the aliphatic diisocyanates such as isophorone diisocyanate, 1,6-diisocyanatohexane and 4,4'-diisocyanatodicyclohexylmethane.

Polyfunctional isocyanate-reactive compositions for use in the preparation of open celled rigid polyurethane foams include any of those known in the art for the preparation of rigid polyurethane or urethane-modified polyisocyanurate foams. Of particular importance for the preparation of rigid foams are polyols and polyol mixtures having average hydroxyl numbers of from 300 to 1000, especially from 300 to 700 mg KOH/g, and hydroxyl functionalities of from 2 to 8, especially from 3 to 8. Suitable polyols have been fully described in the prior art and include reaction products of alkylene oxides, for example ethylene oxide and/or propylene oxide, with initiators containing from 2 to 8 active hydrogen atoms per molecule. Suitable initiators include: polyols, for example glycerol, trimethylolpropane, triethanolamine, pentaerythritol, sorbitol and sucrose; polyamines, for example ethylene diamine, tolylene diamine, diaminodiphenylmethane and polymethylene polyphenylene polyamines; and aminoalcohols, for example ethanolamine and diethanolamine; and mixtures of such initiators. Other suitable polymeric polyols include polyesters obtained by the condensation of appropriate proportions of glycols and higher functionality polyols with dicarboxylic or polycarboxylic acids. Still further suitable polymeric polyols include hydroxyl terminated polythioethers, polyamides, polyesteramides, polycarbonates, polyacetals, polyolefins and polysiloxanes. The quantities of the polyisocyanate compositions and the polyfunctional isocyanate-reactive compositions to be reacted will depend upon the nature of the rigid polyurethane or urethane-modified polyisocyanurate foam to be produced and will be readily determined by those skilled in the art.

The preparation of open celled rigid polyurethane foam may be carried out in the presence of any of the blowing agents known in the art for the preparation of rigid polyurethane or urethane-modified polyisocyanurate foams. Such blowing agents include water or other carbon dioxide-evolving compounds, or inert low boiling compounds having a boiling point of above -70°C at atmospheric pressure.

In order to reach low thermal conductivity levels at reduced pressure levels, open celled rigid polyurethane foams having decreased cell sizes (in the range 50 to 150 micron) have been used.

These fine celled open celled rigid polyurethane foams can be obtained by

incorporating an insoluble fluorinated compound into the foam-forming mixture.

The term insoluble as used herein with reference to the insoluble fluorinated compound to be used in the preparation of fine celled open celled rigid polyurethane foam is defined as showing a solubility in either the isocyanate-reactive composition or the polyisocyanate composition with which it is to be blended of less than 500 ppm by weight at 25°C and atmospheric pressure.

Insoluble fluorinated compounds for use in the preparation of fine celled open celled rigid polyurethane foam include any of those disclosed in US Patent No. 4,981,879, US Patent No. 5,034,424, US Patent No. 4,972,002, European Patent Applications Nos 0508649 and 0498628 and in PCT patent publication no. 95/18176.

Suitable compounds include substantially fluorinated or perfluorinated hydrocarbons, substantially fluorinated or perfluorinated ethers, substantially fluorinated or perfluorinated tertiary amines, substantially fluorinated or perfluorinated amino-ethers and substantially fluorinated or perfluorinated sulphones.

The term substantially fluorinated as used herein with reference to the insoluble, substantially fluorinated compound to be used in the preparation of fine celled open celled rigid polyurethane foam is to be understood to embrace compounds in which at least 50 % of the hydrogen atoms of the unfluorinated compounds are replaced by fluorine.

Suitable examples of substantially fluorinated or perfluorinated hydrocarbons are those containing from 1 to 15 carbon atoms, which may be either cyclic or acyclic, either aromatic or aliphatic and either saturated or unsaturated, such as substantially fluorinated and perfluorinated methane, ethane, propane, butane, pentane, hexane, heptane, octane, nonane, decane, cyclobutane, cyclooctane, cyclohexane, cyclopentane, cycloheptane, norbornadiene, decaline, dimethylcyclobutane, methylcyclohexane, 1-methyldecaline, phenanthrene, dimethylcyclobutane, and isomers thereof and perfluoro(cyclo)olefins such as hexafluoropropene dimers and trimers. Particular mention may be made of the various isomers of perfluoropentane and perfluorohexane such as perfluoro-n-pentane and perfluoro-n-hexane and perfluoro(4-methylpent-2-ene).

Suitable examples of substantially fluorinated or perfluorinated ethers are those containing from 3 to 15 carbon atoms, which may be cyclic or acyclic, such as substantially fluorinated or perfluorinated dialkyl ethers and alkyl substituted cyclic ethers. Particular mention may be made of perfluorinated methyl ethyl ether, perfluorinated methyl propyl ether, the perfluorinated

alkyltetrahydropyrans such as perfluorinated propyltetrahydropyran, and the perfluorinated alkyltetrahydrofurans such as perfluorinated propyltetrahydrofuran and perfluorinated butyltetrahydrofuran. Additional examples of substantially fluorinated or perfluorinated ethers which are suitable for use in the process of the invention are the commercially available fluorinated polyethers such as Galden HT 100, HT 200, HT 230, HT 250 and HT 270 from Montefluos SpA (Galden is a Trade Mark).

Suitable examples of substantially fluorinated or perfluorinated amines are tertiary amines containing from 3 to 15 carbon atoms, which may be cyclic or acyclic, such as substantially fluorinated or perfluorinated trialkylamines, N-alkylated cyclic amines, tetraalkylhydrazines and trialkylhydroxylamines. Particular mention may be made of substantially fluorinated or perfluorinated trimethylamine, triethylamine, ethyldimethylamine, methyldiethylamine, tripropylamine, tributylamine, tripentylamine, tetramethylhydrazine, trimethylhydroxylamine, O-ethyl dimethylhydroxylamine, O,O'-bis-(dialkylamino)propylene-glycol, O,O'-bis-(dialkylamino)ethyleneglycol, N-methylpyrrolidine and the N-alkylpiperidines such as N-methylpiperidine.

Suitable examples of substantially fluorinated or perfluorinated aminoethers include those having from 3 to 15 carbon atoms, which may be cyclic or acyclic, such as substantially fluorinated or perfluorinated trialkylethanolamines and N-alkylmorpholines. Particular mention may be made of substantially fluorinated or perfluorinated trimethylethanolamines and N-(C₁₋₆ alkyl)morpholines such as N-methyl, N-ethyl and N-isopropylmorpholine.

Suitable examples of substantially fluorinated or perfluorinated sulphones include perfluorinated dialkylsulphones having from 2 to 8 carbon atoms such as perfluoro-(dimethylsulphone) and perfluoro-(methyldiethyl-sulphone).

Certain insoluble fluorinated compounds suitable for use in the preparation of fine celled open celled rigid polyurethane foam may themselves act as blowing agents under the conditions pertaining to the foam-forming reaction, particularly where their boiling point is lower than the exotherm temperature achieved by the reaction mixture. For the avoidance of doubt, such materials may, partly or completely, fulfil the function of blowing agent in addition to that of insoluble fluorinated compound.

The amount of the insoluble fluorinated compound to be used in the preparation of fine celled open celled rigid polyurethane foam ranges from 0.05 to 10 %, preferably from 0.1 to 5 %, most preferably from 0.6 to 2.3 % by weight based on the total foam-forming composition.

The insoluble fluorinated compound will usually be incorporated in the foam-


forming reaction mixture in the form of an emulsion or preferably a microemulsion in one of the major components, that is to say in the isocyanate-reactive component and/or the polyisocyanate component. Such emulsions or microemulsions may be prepared using conventional techniques and suitable emulsifying agents.

Emulsifying agents suitable for preparing stable emulsions or microemulsions of fluorinated liquid compounds in organic polyisocyanates and/or isocyanate-reactive compounds include surfactants chosen from the group of nonionic, ionic (anionic or cationic) and amphoteric surfactants. Preferred surfactants are fluoro surfactants, silicone surfactants and/or alkoxyated alkanes. Particular examples of fluoro surfactants include fluorinated alkyl polyoxyethylene ethanols, fluorinated alkyl alkoxyates and fluorinated alkyl esters. Examples of useful fluorinated surfactants which are commercially available are Fluorad FC 430 and FC 431 from 3M, Forafac 1110D, 1157, 1157N and 1199D from Atochem and Fluowet S 3690, OTN and CD from Hoechst.

The amount of emulsifying agent used is between 0.02 and 5 pbw per 100 pbw of foam forming reaction system and between 0.05 and 10 pbw per 100 pbw of polyisocyanate or polyol composition.

In addition to the polyisocyanate and polyfunctional isocyanate-reactive compositions, the insoluble fluorinated compound and the blowing agent, the foam-forming reaction mixture will commonly contain one or more other auxiliaries or additives conventional to formulations for the production of open celled rigid polyurethane and urethane-modified polyisocyanurate foams. Such optional additives include crosslinking agents, for examples low molecular weight polyols such as triethanolamine, foam-stabilising agents or surfactants, for example siloxane-oxyalkylene copolymers, urethane catalysts, for example tin compounds such as stannous octoate or dibutyltin dilaurate or tertiary amines such as dimethylcyclohexylamine or triethylene diamine, fire retardants, for example halogenated alkyl phosphates such as tris chloropropyl phosphate or alkyl phosphonates, and cell-opening agents such as polymer particles (such as polymer polyols), incompatible liquids such as solvents or polyols, inorganic fillers such as bentonite clays, silica particles (particularly fumed silica), metal flakes and stearates.

A particularly preferred process for the preparation of open celled fine celled rigid polyurethane or urethane-modified polyisocyanurate foam is described in EP 498628 and WO 95/02620 (both incorporated herein by reference) and comprises the step of reacting an organic polyisocyanate with an isocyanate-reactive material in the presence of a blowing promotor being an isocyanate-reactive cyclic compound of formula:

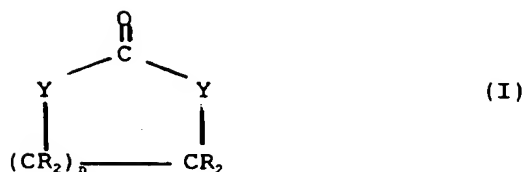

wherein

Y is O or NR¹ wherein each R¹ independently is a lower alkyl radical of C₁-C₆ or a lower alkyl radical substituted with an isocyanate-reactive group; each R independently is hydrogen, a lower alkyl radical of C₁-C₆ or (CH₂)_n-X wherein X is an isocyanate-reactive group which is OH or NH₂, and m is 0, 1 or 2; and


n is 1 or 2;

with the proviso that at least one of R¹ or R is or comprises an isocyanate-reactive group;


and in the presence of an insoluble fluorinated compound and in the presence of a metal salt catalyst.

A preferred compound of formula (I) wherein Y is O is an isocyanate-reactive cyclic carbonate which is glycerol carbonate.

Preferred compounds of formula (I) wherein Y is NR¹ are isocyanate-reactive cyclic ureas of formula:

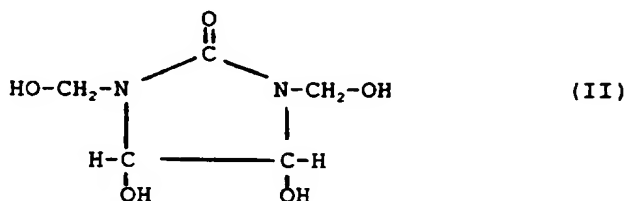

and

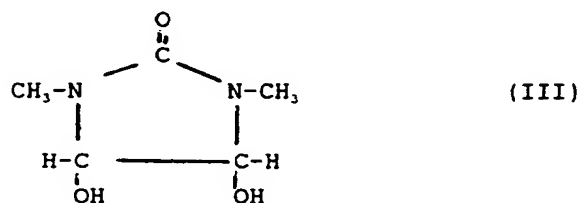

The isocyanate-reactive cyclic blowing promotor is used in amounts ranging from 0.1 to 99 %, preferably from 1 to 60 % by weight based on the total isocyanate-reactive material.

Suitable further blowing agents may be used in the said preferred process

of the present invention such as water or inert low boiling compounds having a boiling point of above -50°C at 1 bar.

5 The amount of water used as blowing agent may be selected in known manner to provide foams of the desired density, typical amounts being in the range from 0.05 to 5 parts by weight per 100 parts by weight of reactive ingredients, although it may be a particular embodiment of the present invention to incorporate up to 10 % by weight or even up to 20 % by weight of water.

10 Suitable inert blowing agents include, for example, hydrocarbons, dialkyl ethers, alkyl alkanoates, aliphatic and cycloaliphatic hydrofluorocarbons, hydrochlorofluorocarbons, chlorofluorocarbons and fluorine-containing ethers. Suitable hydrocarbon blowing agents include lower aliphatic or
15 cyclic hydrocarbons such as n-pentane, isopentane, cyclopentane, neopentane, hexane and cyclohexane.

Preferred metal salt catalysts are those selected among group Ia and group IIa metal salts, more preferably among group Ia and group IIa metal
20 carboxylates.

Particularly suitable catalysts are potassium acetate and potassium ethylhexoate.

25 The metal salt catalyst is used in amounts ranging from 0.01 to 3 % by weight based on the total reaction system.

Apart from the metal salt catalyst some amine catalyst may be used in this process.

30 In operating the process for making open celled rigid polyurethane foams, the known one-shot, prepolymer or semi-prepolymer techniques may be used together with conventional mixing methods and the rigid foam may be produced in the form of slabstock, mouldings, cavity fillings, sprayed foam, frothed
35 foam or laminates with other materials such as hardboard, plasterboard, plastics, paper or metal.

To reduce the number of component streams delivered to the final mixing apparatus, most of the additives such as the blowing agent, catalyst,
40 fluorinated compound and optionally others may be premixed with one of the major components of the foam formulation, in general with the isocyanate-reactive component.

45 Suitable enveloping vessels need to be highly impermeable for gases as the gas permeation rate of the vessel directly affects both the occurrence of heat leakage and thus the thermal insulation efficiency of the resulting

evacuated insulation panel as well as the operating lifetime of the panel. Also, they should prevent transmission of heat by conduction or radiation, be easily sealable by heat sealing and flexible so that they can bend.

5 Materials suitable for the vessel include plastics such as polyester, polyvinylidene chloride, polypropylene and polyvinyl alcohol. Preferably the plastics film is vapor deposited with a metallic film or laminated with a metallic foil providing for higher protection against vacuum leak. The plastic film bag may also include a thermoplastic heat sealing layer
10 consisting of a thermoplastic resin having a relatively low melting point (lower than 200 °C). Examples of suitable thermoplastics include polyolefins, such as low density polyethylene, high density polyethylene and polypropylene, polyacrylonitrile, polyvinylidenechloride and copolymers thereof, and polyamide, such as nylon 11 and nylon 12, or a similar
15 synthetic resin.

For the film deposited on or foil laminated with the plastics film metals can be used such as aluminum, titanium, lead, iron and alloys thereof or tin and its alloys, such as tin alloys with antimony, bismuth and copper or
20 mixtures thereof. Preference is given to a laminate of a thin Al foil.

It is preferred to precondition the insulating filler material prior to placement in the gastight envelope.

25 This preconditioning involves heating and optionally, agitating the filler material in order to remove contaminants from the surface of the filler. The removal of filler contaminants improves inter alia the expected panel life. Further the removal of contaminants reduces the time required to evacuate the vessel thereby reducing the time and cost associated with the manufacture of an evacuated insulation panel.

30 Reduced pressures may also be used together with heating and/or agitation.

Generally it will be necessary to include a getter to remove residual gases or vapors that may still be present in the sealed panels or that permeate the enclosure from the outside atmosphere. Suitable materials for use as a
35 getter are, for example, granulated calcium sulfate or microporous bariumoxide which is excellent in removing water vapor, activated carbon to remove organic gases, metals to absorb oxygen and nitrogen and zeolites to absorb carbon dioxide and nitrogen. Other known getters are described in U.S. Patent Nos. 4,000,246; 4,444,821; 4,663,551; 4,702,963; 4,726,974 and
40 in European Patent Publication Nos. 434266 and 181778.

The non-planar evacuated insulation panels of the present invention are produced by enveloping an insulating foam in a substantially gas impermeable flexible vessel, evacuating the whole and sealing, wherein the insulating
45 material is provided with at least one groove prior to evacuation.

The panels of the invention do not show any undesired deformation or any other surface defects. Furthermore, they have insulation properties equivalent to planar panels. However, when applied in e.g. refrigerators, energy consumption will be reduced due to the elimination of heat losses at the edges.

The present method involves cutting a flat panel of the insulating material having the desired thickness or thickness variations such that a surface area corresponding to the dimension of the ultimate construction is obtained and a two-dimensional shape such that the desired ultimate three-dimensional shape can be obtained upon bending.

One or more grooves having the required depth and shape are provided in the foam from end to end in a chosen direction and at the appropriate position and side so as to obtain the desired ultimate construction after evacuation. Dust arising from the grooving of the foam should be carefully removed. Subsequently, the insulating material is enveloped in a suitable manner as described hereinbefore, and the whole is evacuated.

The evacuation is conveniently carried out by use of a vacuum pump which is connected to the area to be evacuated. After the evacuation operation the pressure in the created vacuum should be about 10 mm Hg or less. Pressures as low as 1 mm Hg or even below 1 mm Hg are preferred. Upon evacuation the evacuated insulation panels take their final form.

The evacuated construction is finally sealed.

The interior angle between two parts of the bent panel is between 0° and 180°, suitably between 30° and 175°.

It has been found that the interior angle between the two parts of the bent panel is influenced by the thickness of the panel and the depth and shape of the groove. To a large extent however it will be determined by the angle of the groove.

For a given panel thickness, groove shape and depth, the larger the groove angle the smaller the interior angle of the two parts becomes. For example a groove angle of 108° will usually provide a panel bended over 90°.

Generally, V-shaped grooves will be made, but U-shaped or rectangular grooves have also proven to be efficient. However, other shapes of grooves can be used as well.

The shaping of the panels does not influence the thermal conductivity properties.

It is also surprising that even under the quite substantial forces to which

the panels are subjected during shaping, the foam does not break.

Since a multitude of straight or curved grooves of multiple sizes, shapes and depths can be applied on one or more sides of a flat panel, integral panels of any desired shape can be obtained by this invention.

For example, U-, L-, Z- or S-shaped panels can be made by combining several grooves at the appropriate positions and sides. Multiple grooves can be used to get quasi-curved shaped panels.

The use of curved grooving can result in spherical bending of the panel.

Refrigeration appliance is only a single example of a product that can utilise evacuated insulation panels. They can also form part of an insulated building panel. Other environments having a hot side and a cold side could also benefit from the use of the present invention.

The evacuated insulation panels can be easily arranged in the door and walls of a refrigerator. They are generally attached by adhesive to the walls of the thermal device to be insulated and then foamed-in-place with a liquid organic material such as polyurethane. The polyurethane foam then assists in holding the panels between the walls and also provides additional insulation.

Rectangular or cubic panels, for example, are particularly useful in the insulation of compressor zones in refrigerators or freezers. Cylindrical panels can be used, for example, as insulation means for boilers and heating pipes or tubes.

The various aspects of this invention are illustrated but not limited by the following examples.

EXAMPLE 1

Rigid open celled polyurethane foam was made according to the process described in European Patent Publication No. 0498628.

Blocks of different sizes were cut from the prepared foam and grooves were provided in these blocks as shown in figures 1a to 3a. These foams were then enveloped in a gas impermeable flexible film and evacuated.

Evacuated insulation panels of different sizes were obtained as shown in figures 1b to 3b.

In figure 1:

$w_1 = w_2 = 130 \text{ mm}$

$l = 480 \text{ mm}$

$t_1 = 8 \text{ mm}$

$t_2 = 15 \text{ mm}$

$t_2 = 5 \text{ mm}$
 $\alpha = 108^\circ$
 $\beta = 90^\circ$

5 In figure 2:

$w = 640 \text{ mm}$
 $w_1 = 273 \text{ mm}$
 $w_2 = 260 \text{ mm}$
 $l = 420 \text{ mm}$

10 $t = 20 \text{ mm}$
 $t_1 = t_2 = 5 \text{ mm}$
 $\alpha_1 = \alpha_2 = 108^\circ$
 $\beta_1 = \beta_2 = 90^\circ$

15 In figure 3:

$w = 600 \text{ mm}$
 $w_1 = 200 \text{ mm}$
 $w_2 = 66 \text{ mm}$
 $l = 240 \text{ mm}$

20 $t = 15 \text{ mm}$
 $t_1 = 5 \text{ mm}$
 $t_2 = 10 \text{ mm}$
 $\alpha_1 = 108^\circ$
 $\alpha_2 = 90^\circ$

25 $r = 250 \text{ mm}$
 $s = 260 \text{ mm}$
 $z = 460 \text{ mm}$

EXAMPLE 2

30

Rigid open celled polyurethane foam was made according to the process described in European Patent Publication No. 0498628.

Two blocks of size 40 x 20 x 2 cm were cut from the prepared foam. In one block a groove was provided as shown in figure 4a ($w = 400 \text{ mm}$, $w_1 = 300 \text{ mm}$,
35 $w_2 = 100 \text{ mm}$, $t = 20 \text{ mm}$, $t_1 = 5 \text{ mm}$, $l = 200 \text{ mm}$, $\alpha = 90^\circ$).

Both blocks of foam after heat treatment were enveloped in a gas impermeable film (thin Al layer provided on one side with PET and on the other side with a polyethylene heat sealing layer), evacuated and sealed. A getter had been provided within the panel. The grooved block bended and a panel of the
40 shape as shown in figure 4b resulted ($\beta = 45^\circ$).

The thermal conductivity of both of the obtained panels was measured according to standard ISO 2581, initially and after 7 and 14 days. The results are presented in Table 1.

45


Table 1

		Flat panel	Bended panel
Lambda initial	mW/mK	7.4	7.2
Lambda after 7 days	mW/mK	7.4	7.5
Lambda after 14 days	mW/mK	7.4	7.3

These results show that the bending of the panels does not detrimentally affect the thermal insulation properties of the panels.

CLAIMS

1. Rigid integral evacuated insulation panel comprising an insulating foam enveloped in a substantially gas impermeable flexible vessel characterised in that the panel is non-planar.
2. Panel according to claim 1 wherein the substantially gas impermeable vessel is a multilayer flexible barrier film.
3. Panel according to claim 1 or 2 wherein the insulating foam comprises an open celled rigid polyurethane or urethane-modified polyisocyanurate foam.
4. Panel according to claim 3 wherein the open celled rigid polyurethane or urethane-modified polyisocyanurate foam is prepared by reacting an organic polyisocyanate composition with a polyfunctional isocyanate-reactive composition in the presence of a blowing promotor which is an isocyanate-reactive cyclic compound of formula

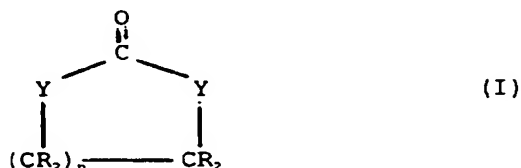

wherein

Y is O or NR^1 wherein each R^1 independently is a lower alkyl radical of $\text{C}_1\text{-C}_6$ or a lower alkyl radical substituted with an isocyanate-reactive group;

each R independently is hydrogen, a lower alkyl radical of $\text{C}_1\text{-C}_6$ or $(\text{CH}_2)_m\text{-X}$ wherein X is an isocyanate-reactive group which is OH or NH_2 and m is 0, 1 or 2; and

n is 1 or 2;

with the proviso that at least one of R^1 or R is or comprises an isocyanate-reactive group;

and in the presence of an insoluble fluorinated compound and a metal salt catalyst.

5. Panel according to any one of the preceding claims wherein the panel further comprises a getter material.
6. Panel according to any one of the preceding claims wherein the interior angle between two parts of the non-planar panel is between 30° and 175° .

7. Panel according to any one of the preceding claims wherein the panel is of cylindrical, rectangular, L-, Z-, U- or S-shape.
- 5 8. Method for producing a panel as defined in any one of claims 1 to 7 by enveloping an insulating foam in a substantially gas impermeable flexible vessel, evacuating the whole and sealing, characterised in that the insulating foam is provided with at least one groove prior to evacuation.
- 10 9. Method according to claim 8 wherein a multitude of grooves is provided in the foam.
10. Method according to claim 8 or 9 wherein grooves are provided on both sides of the foam.
- 15 11. Method according to any one of claims 8 to 10 wherein different types of grooves are provided in the foam.
- 20 12. Method according to any one of claims 8 to 11 wherein the grooves are V-shaped.
13. Use of a shaped evacuated insulation panel as defined in any one of claims 1 to 7 as thermal insulation.
- 25 14. Use according to claim 13 in refrigerators, heating pipes or tubes, or boilers.

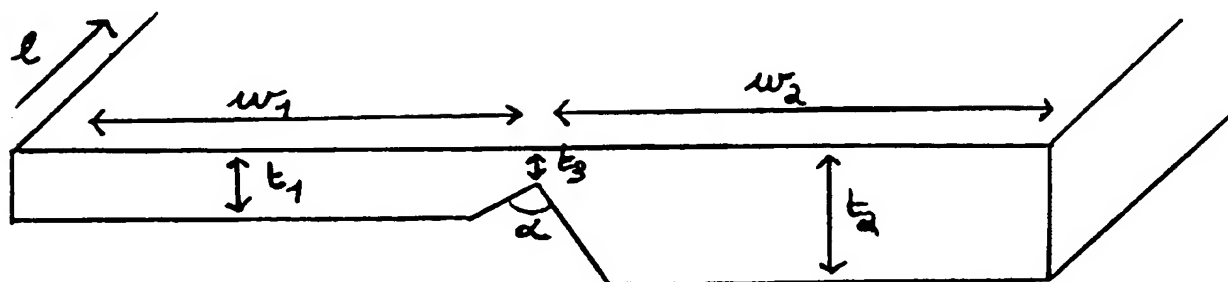


FIG. 1a

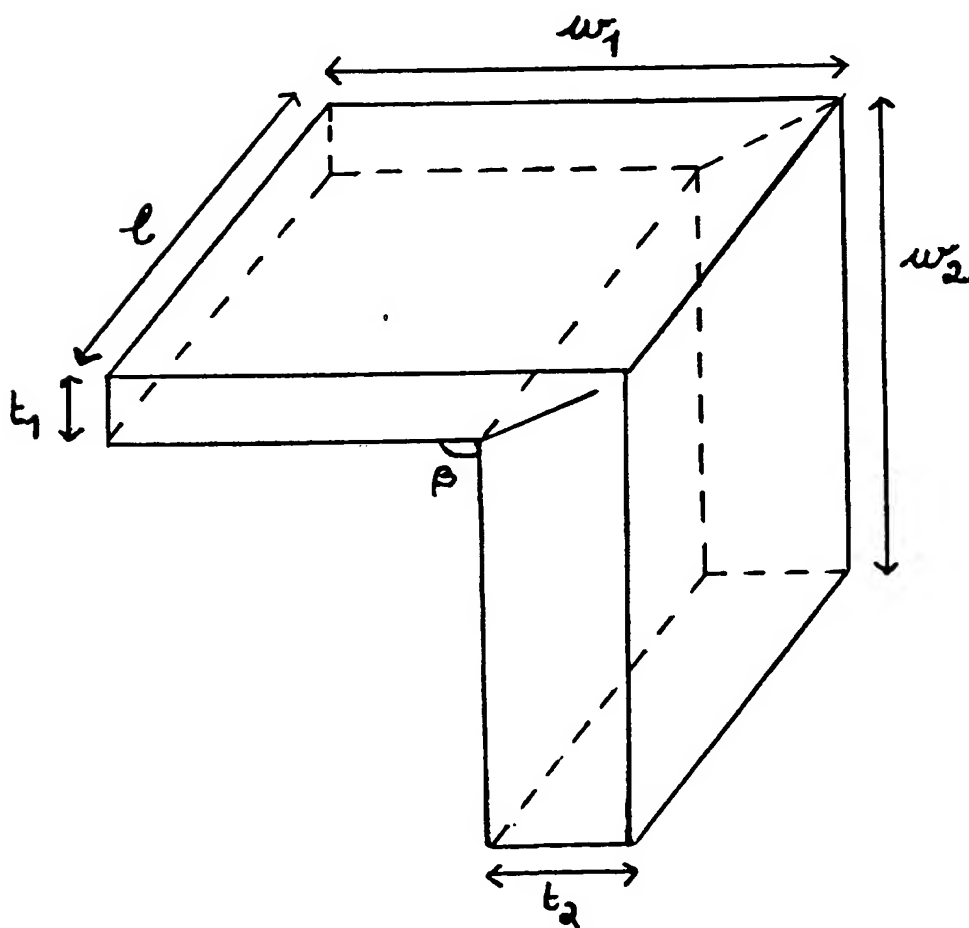


FIG. 1b

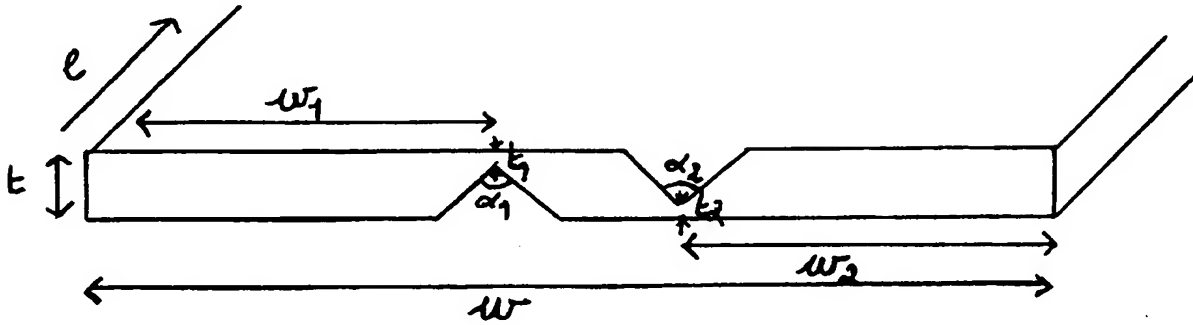


FIG 2a

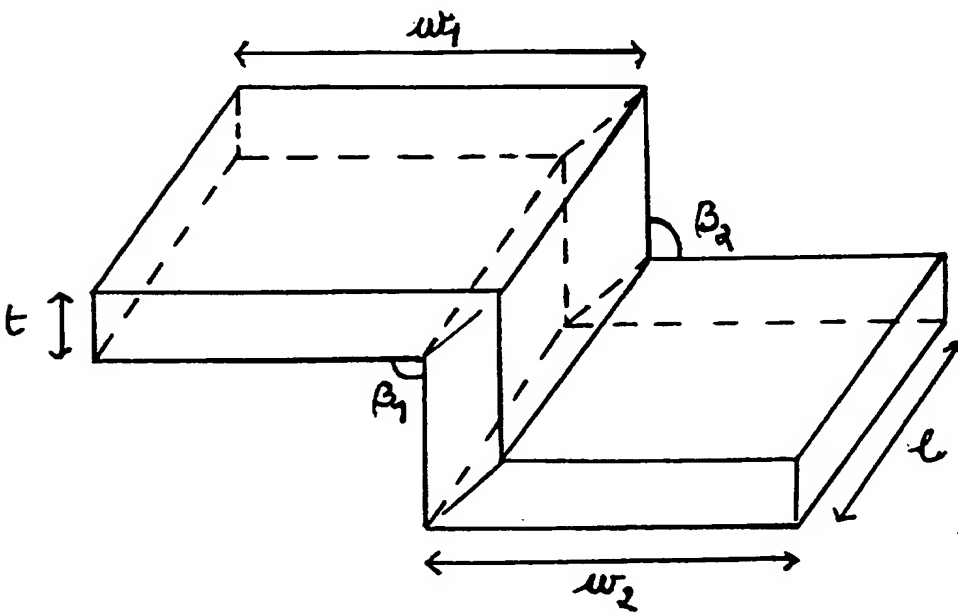


FIG 2b

3/4

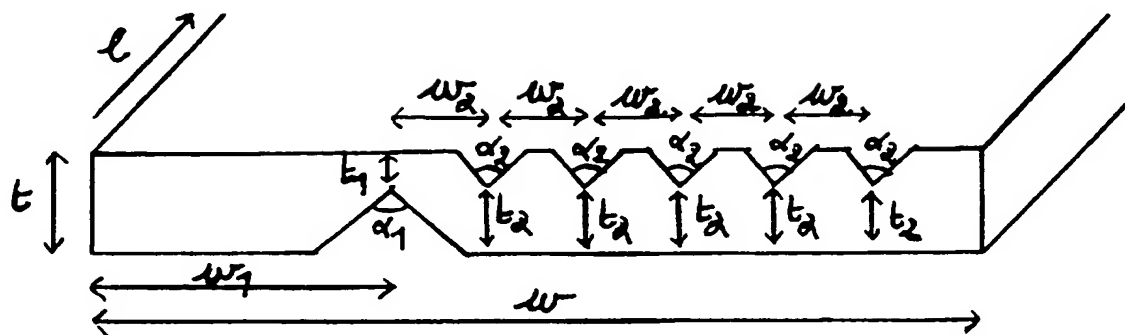


FIG 3a

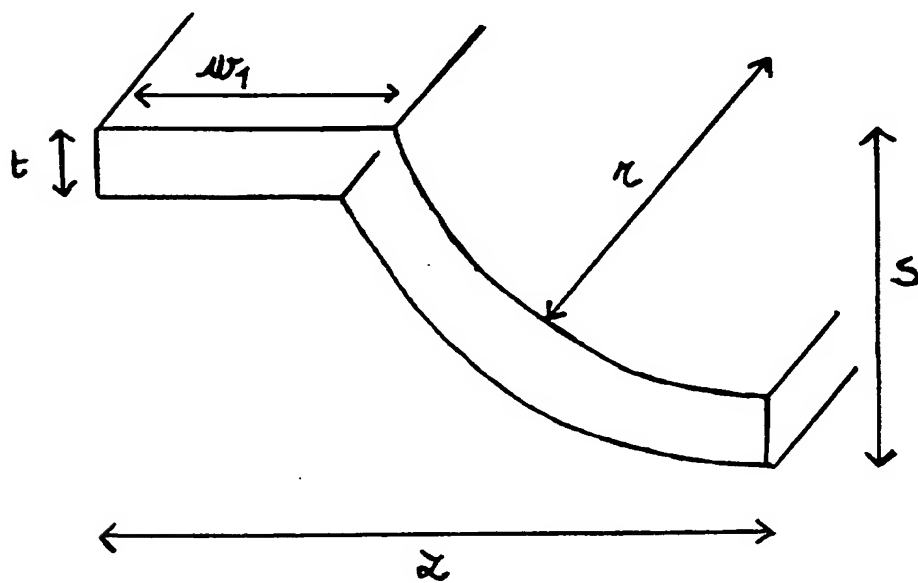


FIG 3b

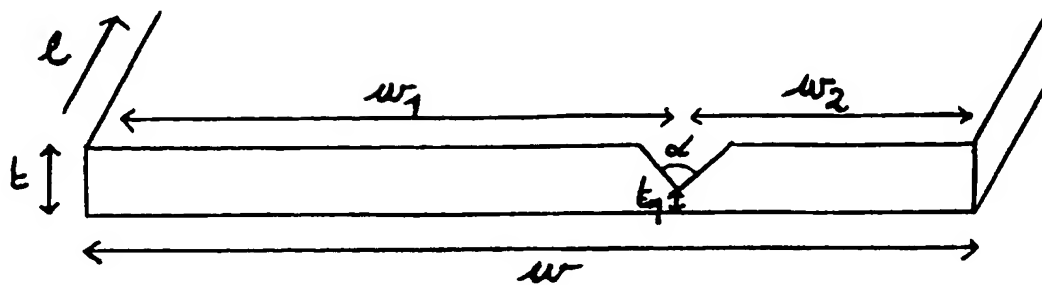


FIG 4a

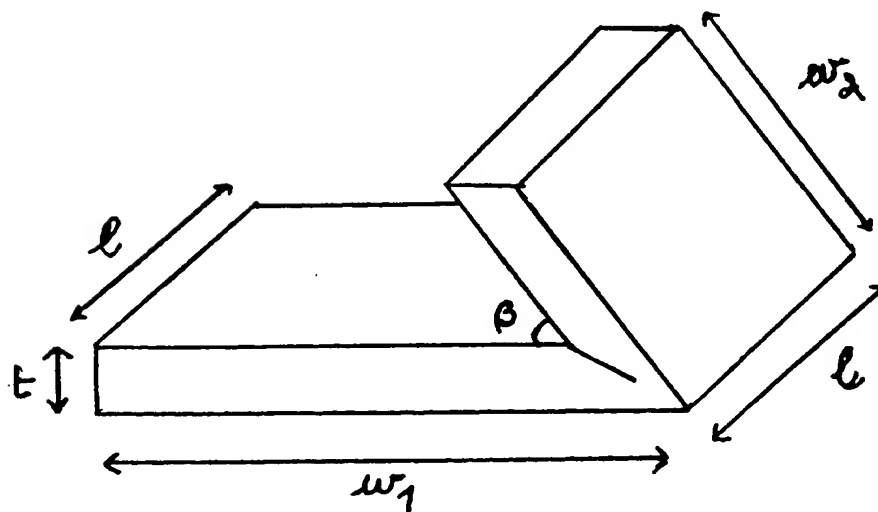


FIG 4b

INTERNATIONAL SEARCH REPORT

International Application No
PCT/EP 96/01158

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 F16L59/06 B29C53/06 B32B5/18

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 6 F16L B29C B32B F25D F17C B65D E04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	PATENT ABSTRACTS OF JAPAN vol. 95, no. 004 & JP,A,07 091594 (MATSUSHITA ELECTRIC IND CO LTD), 4 April 1995,	1,2,6,7, 13,14
Y	see abstract; figures 1-4 ---	3-5
P,X	PATENT ABSTRACTS OF JAPAN vol. 95, no. 008 & JP,A,07 195385 (TOSHIBA CORP;OTHERS: 01), 1 August 1995,	1-3,6,7, 13,14
Y	see abstract ---	4,5
P,X	PATENT ABSTRACTS OF JAPAN vol. 95, no. 006 & JP,A,07 151297 (MEISEI KOGYO KK), 13 June 1995, see abstract; figures 1-4 ---	1,7-10, 13,14
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- "&" document member of the same patent family

Date of the actual completion of the international search

5 July 1996

Date of mailing of the international search report

19.07.96

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+31-70) 340-3016

Authorized officer

Van Nieuwenhuize, O

INTERNATIONAL SEARCH REPORT

International Application No
PCT/EP 96/01158

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO,A,95 02620 (IMPERIAL CHEMICAL INDUSTRIES PLC) 26 January 1995 cited in the application see claims 1,17-20; examples 2,3 ---	3-5
Y	EP,A,0 498 628 (IMPERIAL CHEMICAL INDUSTRIES PLC) 12 August 1992 cited in the application see page 5, line 32 - line 37; claim 1 ---	3,4
Y	DATABASE WPI Week 8829 Derwent Publications Ltd., London, GB; AN 88-200226 XP002007615 & JP,A,63 135 694 (SHARP KK) , 8 June 1986 see abstract ---	5
A	EP,A,0 188 806 (MATSUSHITA REFRIGERATION COMPANY) 30 July 1986 cited in the application see page 9, line 18 - page 11, line 18 see page 41, line 1 - line 23 ---	1,2,13, 14
P,A	PATENT ABSTRACTS OF JAPAN vol. 95, no. 010 & JP,A,07 269778 (TOSHIBA CORP;OTHERS: 01), 20 October 1995, see abstract ---	1-3,8, 13,14
A	EP,A,0 261 033 (L'AIR LIQUIDE, SOCIETE ANONYME) 23 March 1988 see claims 1-4,11 ---	1-7,18, 19
A	EP,A,0 547 515 (TAKEDA CHEMICAL INDUSTRIES, LIMITED) 23 June 1993 see page 1, line 1 - line 55 see page 4, line 21 - line 34; claim 1 ---	3
A	EP,A,0 440 031 (NISSHINBO INDUSTRIES, INC) 7 August 1991 see claims 1,4; figure 2 ---	7
A	DE,A,43 11 510 (BOSCH-SIEMENS HAUSGERÄTE GMBH) 13 October 1994 cited in the application see claim 7; figures 1-4 ---	8-14
A	EP,A,0 644 036 (ISOBOX TECHNOLOGIES) 22 March 1995 see claims 1,8; figures 1-5 ---	8
	-/--	

INTERNATIONAL SEARCH REPORT

Inter nal Application No

PCT/EP 96/01158

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	FR,A,2 636 255 (JULIUS & AUGUST ERBSLOH GMBH & CO.) 16 March 1990 cited in the application see page 4, line 18 - line 26; claim 1; figures 1-4 ---	6-9
A	DE,A,36 28 469 (JUNKERWERK LINDER & CO) 25 February 1988 see claim 1; figures 1-7 -----	8-12

INTERNATIONAL SEARCH REPORT

Information on patent family members

Int: nal Application No
PCT/EP 96/01158

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO-A-9502620	26-01-95	AU-B- 7184294 EP-A- 0708790	13-02-95 01-05-96
EP-A-498628	12-08-92	AU-B- 642335 AU-B- 1059392 AU-B- 649772 AU-B- 1071792 CA-A- 2060530 CA-A- 2060590 DE-D- 69203104 DE-T- 69203104 EP-A- 0498629 ES-T- 2074819 JP-A- 5070547 JP-A- 5070548	14-10-93 06-08-92 02-06-94 06-08-92 05-08-92 05-08-92 03-08-95 26-10-95 12-08-92 16-09-95 23-03-93 23-03-93
EP-A-188806	30-07-86	JP-B- 1004112 JP-C- 1527131 JP-A- 62062173 JP-C- 1509353 JP-A- 61153476 JP-B- 63061586 JP-A- 61153477 JP-C- 1509354 JP-A- 61153479 JP-B- 63061587 JP-C- 1509355 JP-A- 61153480 JP-B- 63061588 JP-C- 1509356 JP-A- 61153482 JP-B- 63061589 DE-A- 3584672 US-A- 4668555	24-01-89 30-10-89 18-03-87 26-07-89 12-07-86 29-11-88 12-07-86 26-07-89 12-07-86 29-11-88 26-07-89 12-07-86 29-11-88 26-07-89 12-07-86 29-11-88 19-12-91 26-05-87
EP-A-261033	23-03-88	FR-A- 2604157 AU-B- 596216 AU-B- 7860887 CA-A- 1318267 JP-A- 63092897	25-03-88 26-04-90 24-03-88 25-05-93 23-04-88

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No
PCT/EP 96/01158

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP-A-547515	23-06-93	CN-A- 1074226 JP-A- 7053655 US-A- 5457138	14-07-93 28-02-95 10-10-95
EP-A-440031	07-08-91	JP-A- 3208611 DE-D- 69105285	11-09-91 12-01-95
DE-A-4311510	13-10-94	EP-A- 0619452	12-10-94
EP-A-644036	22-03-95	FR-A- 2710003 CZ-A- 9402234	24-03-95 12-04-95
FR-A-2636255	16-03-90	DE-A- 3831363 GB-A- 2222791	29-03-90 21-03-90
DE-A-3628469	25-02-88	NONE	